


KNX Gateway DMX-Web

13506112

KNX-DMX-Gateway

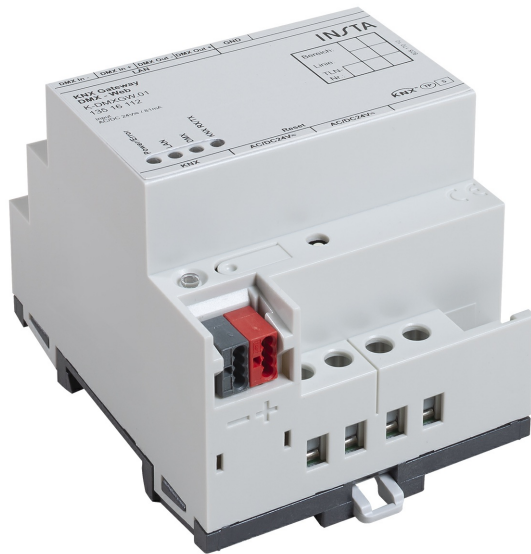

Intelligent system device, RMD-type, for coupling of DMX512 systems to KNX. To this effect, the KNX Gateway DMX-Web is connected to the KNX and the DMX512-bus. The gateway requires AC/DC24 V supply voltage.

Main Features

- > Web control with diagnosis function
- > DMX master or DMX slave
- > Objects like switching, dimming, value and feedback
- > Up to 1024 KNX objects
- > Up to 2000 connections
- > All 512 DMX channels supported
- > ETS4 database for synchronisation with DMX-Gate4



Specifications

Rated voltage	AC/DC24 V SELV
Power consumption	2 W
Degree of protection	IP20
Protection class	III (SELV)
Ambient temperature	-5 ... +45 °C
Storage/transport temperature	-25 ... +70 °C

Interface	KNX / DMX
Number of DMX channels	512
Design	RMD, 4 units
Weight	175 kg
Commissioning mode	S-mode
Rated voltage KNX	DC21 ... 32 V SELV
DMX connection	Screw terminal