


LEDLUX LX TW plane Light insert





The flat light insert stands out through its intense, dynamic white light and can be integrated into the architecture in a modular fashion. In so doing, the light element stands out through its variable colour temperature, flat construction height and high light quality.

Main Features

- > Modular component system guarantees maximum design flexibility and scalability in the object
- > Tunable white for biodynamic lighting and colour dynamic white light in high quality
- > A unique control algorithm guarantees constant brightness over the entire adjustment range
- > Lighting suitable for cameras thanks to flicker-free dimming
- > Background illumination of surfaces thanks to small mounting dimensions



Product Variations

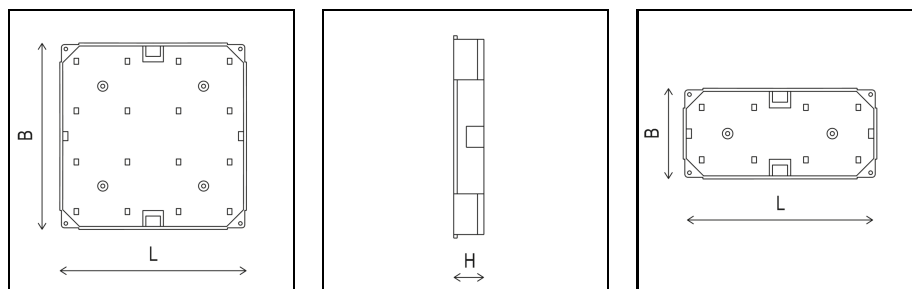

	P	Max. lumin. flux	Width	Weight
LL LX 2765 PR100 (...)	4 W	330 lm	87 mm	0.1 kg
LL LX 2765 PQ200 (...)	7.5 W	660 lm	187 mm	0.2 kg

Specifications

Rated voltage DC	28 V SELV	Length	187 mm
Efficiency class	A+	Height	13 mm
Protection class	III	Connection mode	Plug connector
Optics	None	Cable length	125 mm
Beam angle direct	120°	Dimmable/Controllable	Yes
Light colour	2700 ... 6500 K	Interface	LEDTRIX
Ambient temperature	-20 ... +45 °C	Housing colour	White
Storage/transport temperature	-20 ... +60 °C	Housing material	Plastic
Service life	60,000 h	Cover material	None
		Glow-wire testing	850 °C

Accessories



SNT ELI 0-120 W
58916023



SNT ELI 0-57 W
58916030



SNT ELI 0-9 W Molex plug 3-pole
58910003



instalight Control LEDTRIX Master
50913000



instalight Vario basic device
V2 GR 001



instalight Vario interface module LEDTRIX
V2 FM LX 001



SNT ELI 0-110 W / 30 V
50930074



DMX-LEDTRIX Gateway 2 channel, built-in
51688014