

Light insert High Power Linear

IL 4033 HL 840X A90 1440


Light insert




The High Power Linear light insert ensures efficient lighting with low energy consumption. The optics are optimised for illuminating surfaces from large mounting heights. Installed in the NoLimit profile, the light insert also allows mounting point distances of up to 6 metres.

Main Features

- > Very high luminous efficacy with up to 160 lm/W
- > Compatible with all profiles of the NoLimit family
- > Longitudinal glare suppression possible through additional grid



Product Variations

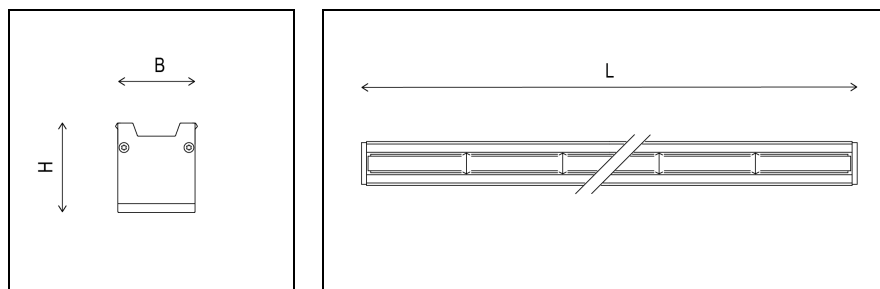

Specifications

Lifecycle Status	Active	Ambient temperature	+5 ... +35 °C
Power consumption	38 W	Service life (L80/B10)	(@ 25 °C) 60,000 h
Degree of protection	IP20	Length (L)	1440 mm
Efficiency class	A++	Width (B)	41 mm
Protection class	III	Height (H)	48 mm
Max luminous flux direct	6100 lm	Connection mode	Molex, 4-pole
Luminous flux direct (white)	6100 lm	Dimmable/Controllable	Yes
Light colour	4000 K	Interface	Depending on the ballast used
Power Index Li	72	Housing material	Aluminium
Luminous efficiency	160 lm/W	Nominal current	900 mA

Accessories



Glare louvre
IL 4033 HL LA 1440