



instalight NoLimit 4033 high power spot single
Rotatable and swivelling light insert

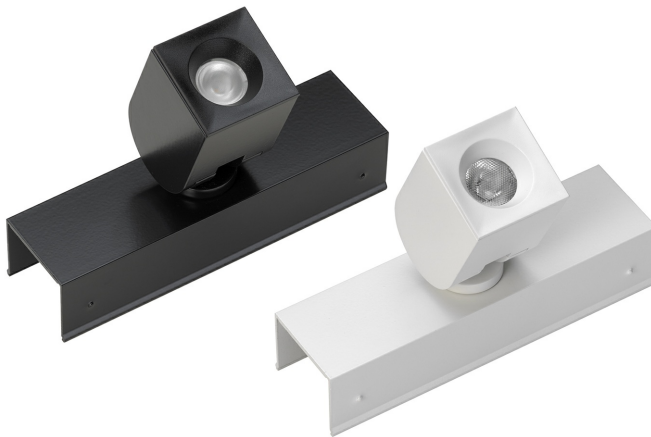




The spotlight modules, which are available in three power classes, can be infinitely rotated and swivelled as well as freely positioned in all profiles of the instalight NoLimit system. With up to six light outlets, high luminance levels can be achieved in accent lighting. The precision optics create a high quality of light.

Main Features


- > Spotlight, which can be infinitely rotated and swivelled to all sides
- > Ideal for lighting situations that require frequent adaptations
- > Homogeneous light mixture within one single optic with Tunable White
- > Precise light projection for all light colours
- > Free placement and positioning inside of the NoLimit system profile
- > Three different optics (spot, medium and oval), three different light colours as well as a Tunable White version provide a very wide range of design possibilities.
- > The engagement position, which can be selected in three stages for all modules, allows further adaptation to the ceiling level and the chosen lighting strategy




Product Variations

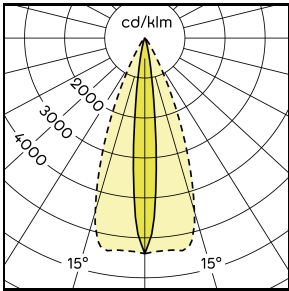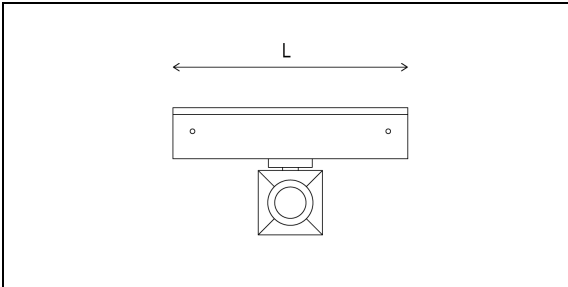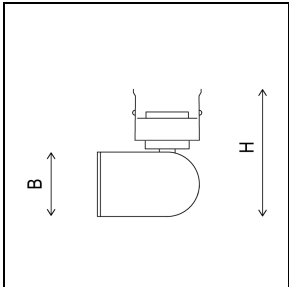


12° X 43°

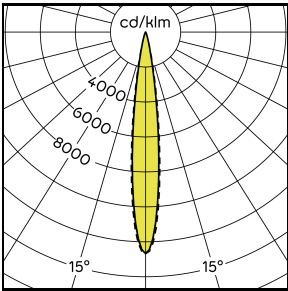


14°

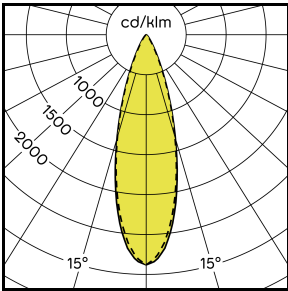



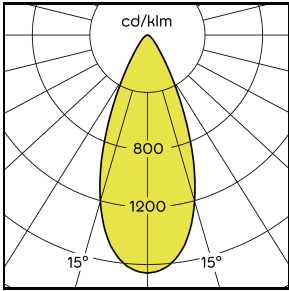



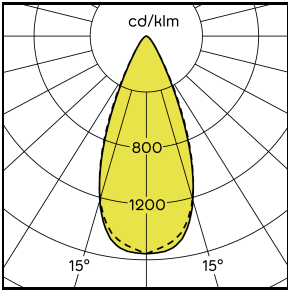










































































30°



43°



45°

				P	Optics dir.	Max. lumin. flux	Light colour	Housing colour
il4033_HS827X_B30_0041_CC_XX01				2.7 W	30°	260 lm	2700 K	RAL 9011 (Black)
il4033_HS827X_W30_0041_CC_XX01				2.7 W	30°	270 lm	2700 K	RAL 9016 (traffic white)
il4033_HS830X_B30_0041_CC_XX01				2.7 W	30°	290 lm	3000 K	RAL 9011 (Black)
il4033_HS840X_B30_0041_CC_XX01				2.7 W	30°	290 lm	4000 K	RAL 9011 (Black)
il4033_HS830X_W30_0041_CC_XX01				2.7 W	30°	300 lm	3000 K	RAL 9016 (traffic white)
il4033_HS840X_W30_0041_CC_XX01				2.7 W	30°	300 lm	4000 K	RAL 9016 (traffic white)
il4033_HS827X_B45_0041_CC_XX01				2.7 W	45°	245 lm	2700 K	RAL 9011 (Black)
il4033_HS827X_W45_0041_CC_XX01				2.7 W	45°	255 lm	2700 K	RAL 9016 (traffic white)
il4033_HS830X_B45_0041_CC_XX01				2.7 W	45°	280 lm	3000 K	RAL 9011 (Black)
il4033_HS840X_B45_0041_CC_XX01				2.7 W	45°	280 lm	4000 K	RAL 9011 (Black)
il4033_HS840X_W45_0041_CC_XX01				2.7 W	45°	285 lm	4000 K	RAL 9016 (traffic white)
il4033_HS830X_W45_0041_CC_XX01				2.7 W	45°	285 lm	3000 K	RAL 9016 (traffic white)
il4033_HS2750_B43_0041_CC_XX01				3 W	43°	250 lm	2700 ... 5000 K (TW)	RAL 9011 (Black)
il4033_HS2750_W43_0041_CC_XX01				3 W	43°	260 lm	2700 ... 5000 K (TW)	RAL 9016 (traffic white)
il4033_HS827X_B14_0041_CC_XX01				2.7 W	14°	270 lm	2700 K	RAL 9011 (Black)
il4033_HS827X_W14_0041_CC_XX01				2.7 W	14°	280 lm	2700 K	RAL 9016 (traffic white)
il4033_HS840X_B14_0041_CC_XX01				2.7 W	14°	310 lm	4000 K	RAL 9011 (Black)
il4033_HS830X_B14_0041_CC_XX01				2.7 W	14°	310 lm	3000 K	RAL 9011 (Black)
il4033_HS830X_W14_0041_CC_XX01				2.7 W	14°	320 lm	3000 K	RAL 9016 (traffic white)
il4033_HS840X_W14_0041_CC_XX01				2.7 W	14°	320 lm	4000 K	RAL 9016 (traffic white)
il4033_HS827X_B5C_0041_CC_XX01				2.7 W	12° X 43°	260 lm	2700 K	RAL 9011 (Black)
il4033_HS827X_W5C_0041_CC_XX01				2.7 W	12° X 43°	270 lm	2700 K	RAL 9016 (traffic white)
il4033_HS830X_B5C_0041_CC_XX01				2.7 W	12° X 43°	285 lm	3000 K	RAL 9011 (Black)
il4033_HS840X_B5C_0041_CC_XX01				2.7 W	12° X 43°	285 lm	4000 K	RAL 9011 (Black)
il4033_HS840X_W5C_0041_CC_XX01				2.7 W	12° X 43°	295 lm	4000 K	RAL 9016 (traffic white)
il4033_HS830X_W5C_0041_CC_XX01				2.7 W	12° X 43°	295 lm	3000 K	RAL 9016 (traffic white)

Specifications

Lifecycle Status	Active
Degree of protection	IP20
Protection class	III
Optics	Clear
Power Index Li	6
Colour consistency	SDCM 3
Ambient temperature	5°C ... 45°C
Service life (L80/B10)	60,000 h (at 25°C)

Length (L)	150 mm
Width (B)	41 mm
Height (H)	105 mm
Connection mode	Plug connector
Dimmable/Controllable	Yes
Interface	depending on the driver
Housing material	Aluminium
Weight	0.4 kg
Nominal current	900 mA

Accessories



Cable bracket set (20 pieces)
IL4033_ZM_K_001



instalight NoLimit 4033 profile cover
IL 4033 BA BL



Short circuit plug 4p
IL4033_KSS



Extension cable routing for Mid Power Linear and High Power modules



Extension cable 4p dt8



Short-circuit connector dt8
IL4033_Q4P_KSS



il4033 Control Gear CC external



il4033 Control Gear CC intra-profile TW DALI DT8



il4033 Control Gear CC intra-profile



il4033 Control Gear CC external TW DALI DT8