


instalight NoLimit 4033 Low Power Linear light insert
Satined light insert RGBW

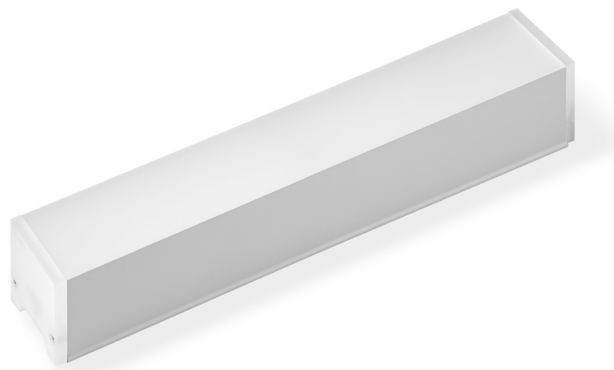




The diffusely radiating Low Power Linear light inserts allow a consistent, self-contained design. Equipped with RGBW LED technology and a DMX-compatible interface, they turn the NoLimit system into a creative lighting tool, for example for light guidance systems in buildings or as effective mood lighting.

Main Features

- > Effective mood lighting or light guidance systems in buildings
- > Homogeneous and uniformly illuminated light line in all mixed colours (RGBW)
- > Individually controllable segments in video quality with a resolution of 8 cm
- > Are supplied up to a length of approximately 2.30 m



Product Variations

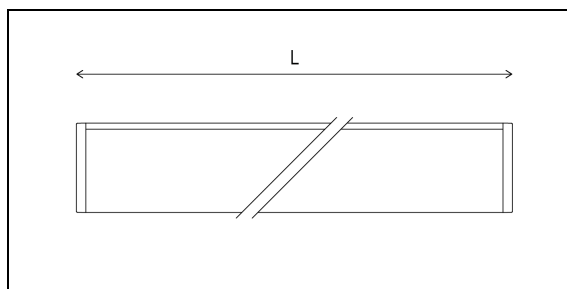

120°

	P	Max. lumin. flux	LI	Length (L)	Weight
ii4033_LLRGBW_WSX_0250_LX_AS01	3.7 W	43 lm	7	250 mm	0.16 kg
ii4033_LLRGBW_WSX_0330_LX_AS01	4.9 W	57 lm	10	330 mm	0.2 kg
ii4033_LLRGBW_WSX_0412_LX_AS01	7.4 W	86 lm	14	412 mm	0.25 kg
ii4033_LLRGBW_WSX_0493_LX_AS01	7.4 W	86 lm	14	493 mm	0.29 kg
ii4033_LLRGBW_WSX_0574_LX_AS01	8.6 W	100 lm	16	574 mm	0.34 kg
ii4033_LLRGBW_WSX_0655_LX_AS01	9.8 W	115 lm	19	655 mm	0.38 kg
ii4033_LLRGBW_WSX_0736_LX_AS01	11.1 W	130 lm	21	736 mm	0.43 kg
ii4033_LLRGBW_WSX_0817_LX_AS01	12.3 W	144 lm	23	817 mm	0.47 kg
ii4033_LLRGBW_WSX_0898_LX_AS01	13.5 W	158 lm	26	898 mm	0.52 kg
ii4033_LLRGBW_WSX_0979_LX_AS01	14.7 W	173 lm	28	979 mm	0.56 kg
ii4033_LLRGBW_WSX_1060_LX_AS01	16 W	187 lm	30	1,060 mm	0.61 kg
ii4033_LLRGBW_WSX_1141_LX_AS01	17.2 W	202 lm	32	1,141 mm	0.65 kg
ii4033_LLRGBW_WSX_1223_LX_AS01	18.4 W	216 lm	35	1,223 mm	0.7 kg
ii4033_LLRGBW_WSX_1303_LX_AS01	19.6 W	230 lm	37	1,303 mm	0.74 kg
ii4033_LLRGBW_WSX_1385_LX_AS01	20.9 W	245 lm	39	1,385 mm	0.79 kg
ii4033_LLRGBW_WSX_1466_LX_AS01	22.1 W	260 lm	41	1,466 mm	0.83 kg
ii4033_LLRGBW_WSX_1547_LX_AS01	23.3 W	274 lm	44	1,547 mm	0.88 kg
ii4033_LLRGBW_WSX_1628_LX_AS01	24.5 W	288 lm	46	1,628 mm	0.92 kg
ii4033_LLRGBW_WSX_1709_LX_AS01	25.8 W	303 lm	48	1,709 mm	0.97 kg
ii4033_LLRGBW_WSX_1790_LX_AS01	27 W	317 lm	51	1,790 mm	1.01 kg
ii4033_LLRGBW_WSX_1872_LX_AS01	28.2 W	331 lm	53	1,872 mm	1.06 kg
ii4033_LLRGBW_WSX_1952_LX_AS01	29.4 W	346 lm	55	1,952 mm	1.1 kg
ii4033_LLRGBW_WSX_2034_LX_AS01	30.7 W	360 lm	57	2,034 mm	1.15 kg
ii4033_LLRGBW_WSX_2115_LX_AS01	31.9 W	375 lm	60	2,115 mm	1.2 kg
ii4033_LLRGBW_WSX_2196_LX_AS01	33.1 W	389 lm	62	2,196 mm	1.24 kg
ii4033_LLRGBW_WSX_2277_LX_AS01	34.3 W	404 lm	64	2,277 mm	1.29 kg

Specifications

Lifecycle Status	Active
Beam Geometry	Axially symmetric
Beam Characteristic	Wide Flood
Light distribution	Symmetric
Rated voltage DC	24 V
Degree of protection	IP20
Protection class	III
Optics	Satined
Beam angle direct	120°

Light colour	RGBW
Ambient temperature	5°C ... 45°C
Service life (L80/B10)	60,000 h (at 25°C)
Width (B)	41 mm
Height (H)	48 mm
Connection mode	Plug connector
Dimmable/Controllable	Yes
Interface	LEDTRIX
Housing colour	RAL 9016 (traffic white)

Accessories




Extension cable LX IP20 0.5 m
IL ZLE IP20 001



Extension cable LX IP20 1.0 m
IL ZLE IP20 002



Extension cable LX IP20 2.0 m
IL ZLE IP20 005



Cable bracket set (20 pieces)
IL4033_ZM_K_001



LEDLUX LX SNT splitter A
IL ZL IP20 002



LEDLUX LX SNT splitter M
IL ZL IP20 003



instalight NoLimit 4033 profile cover



il4033 Control Gear CV intra-profile



il4033 Control Gear CV external