


instalight NoLimit 4033 Mid Power Linear light insert Satined light insert

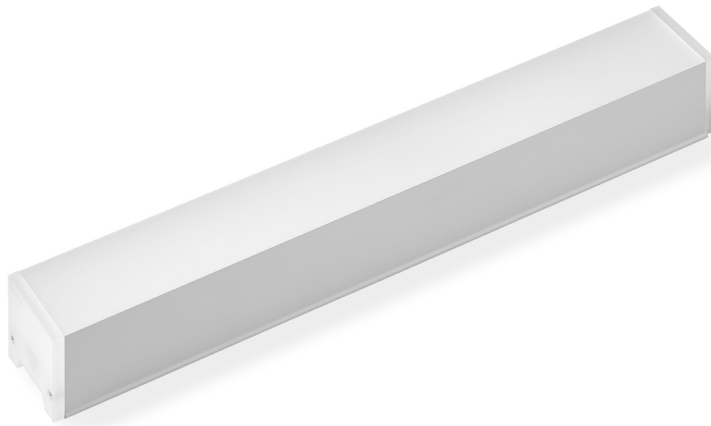




The Mid Power Linear light inserts meet the highest requirements for quality-conscious general lighting. Optionally equipped with Tunable White technology, the diffusely radiating linear modules are ideal for realizing HCL concepts.

Main Features

- > Homogeneous, uniform and linear accent and general lighting
- > No visible light-dark spots on the light-emitting surface
- > Tunable White (2700-5000 K), free of artefacts and perfectly mixed from one optic
- > Are supplied up to a length of approximately 2.30 m



Product Variations

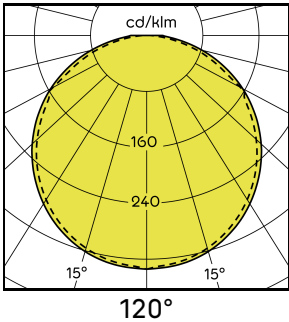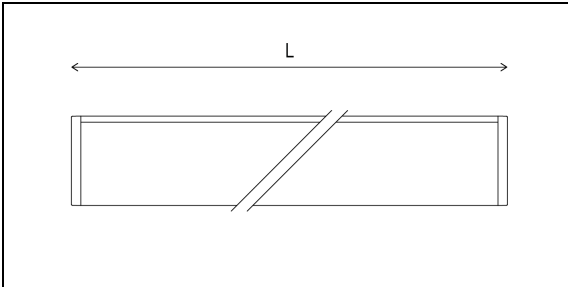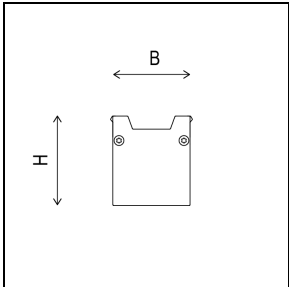

	P	Max. lumin. flux	Light colour	LI	Length (L)	Weight
il4033_ML927X_WSX_0250_CC_XX01	5.7 W	370 lm	2700 K	11	250 mm	0.16 kg
il4033_ML930X_WSX_0250_CC_XX01	5.7 W	403 lm	3000 K	11	250 mm	0.16 kg
il4033_ML940X_WSX_0250_CC_XX01	5.7 W	447 lm	4000 K	11	250 mm	0.16 kg
il4033_ML2750_WSX_0250_CC_XX01	6.1 W	434 lm	2700 ... 5000 K (TW)	12	250 mm	0.16 kg
il4033_ML927X_WSX_0493_CC_XX01	11.4 W	730 lm	2700 K	22	493 mm	0.29 kg
il4033_ML930X_WSX_0493_CC_XX01	11.4 W	796 lm	3000 K	22	493 mm	0.29 kg
il4033_ML940X_WSX_0493_CC_XX01	11.4 W	881 lm	4000 K	22	493 mm	0.29 kg
il4033_ML2750_WSX_0493_CC_XX01	12.2 W	856 lm	2700 ... 5000 K (TW)	23	493 mm	0.29 kg
il4033_ML927X_WSX_0736_CC_XX01	17.2 W	1090 lm	2700 K	33	736 mm	0.43 kg
il4033_ML930X_WSX_0736_CC_XX01	17.2 W	1188 lm	3000 K	33	736 mm	0.43 kg
il4033_ML940X_WSX_0736_CC_XX01	17.2 W	1316 lm	4000 K	33	736 mm	0.43 kg
il4033_ML2750_WSX_0736_CC_XX01	18.3 W	1278 lm	2700 ... 5000 K (TW)	34	736 mm	0.43 kg
il4033_ML927X_WSX_0979_CC_XX01	22.9 W	1450 lm	2700 K	43	979 mm	0.56 kg
il4033_ML930X_WSX_0979_CC_XX01	22.9 W	1580 lm	3000 K	43	979 mm	0.56 kg
il4033_ML940X_WSX_0979_CC_XX01	22.9 W	1750 lm	4000 K	43	979 mm	0.56 kg
il4033_ML2750_WSX_0979_CC_XX01	24.4 W	1700 lm	2700 ... 5000 K (TW)	46	979 mm	0.56 kg
il4033_ML927X_WSX_1223_CC_XX01	28.6 W	1811 lm	2700 K	54	1,223 mm	0.7 kg
il4033_ML930X_WSX_1223_CC_XX01	28.6 W	1974 lm	3000 K	54	1,223 mm	0.7 kg
il4033_ML940X_WSX_1223_CC_XX01	28.6 W	2186 lm	4000 K	54	1,223 mm	0.7 kg
il4033_ML2750_WSX_1223_CC_XX01	30.5 W	2124 lm	2700 ... 5000 K (TW)	57	1,223 mm	0.7 kg
il4033_ML927X_WSX_1466_CC_XX01	34.3 W	2171 lm	2700 K	65	1,466 mm	0.83 kg
il4033_ML930X_WSX_1466_CC_XX01	34.3 W	2366 lm	3000 K	65	1,466 mm	0.83 kg
il4033_ML940X_WSX_1466_CC_XX01	34.3 W	2621 lm	4000 K	65	1,466 mm	0.83 kg
il4033_ML2750_WSX_1466_CC_XX01	36.6 W	2546 lm	2700 ... 5000 K (TW)	68	1,466 mm	0.83 kg
il4033_ML927X_WSX_1709_CC_XX01	40 W	2531 lm	2700 K	76	1,709 mm	0.97 kg
il4033_ML930X_WSX_1709_CC_XX01	40 W	2758 lm	3000 K	76	1,709 mm	0.97 kg
il4033_ML940X_WSX_1709_CC_XX01	40 W	3055 lm	4000 K	76	1,709 mm	0.97 kg
il4033_ML2750_WSX_1709_CC_XX01	42.7 W	2968 lm	2700 ... 5000 K (TW)	80	1,709 mm	0.97 kg
il4033_ML927X_WSX_1952_CC_XX01	45.8 W	2891 lm	2700 K	86	1,952 mm	1.1 kg
il4033_ML930X_WSX_1952_CC_XX01	45.8 W	3150 lm	3000 K	86	1,952 mm	1.1 kg
il4033_ML940X_WSX_1952_CC_XX01	45.8 W	3489 lm	4000 K	86	1,952 mm	1.1 kg
il4033_ML2750_WSX_1952_CC_XX01	48.8 W	3390 lm	2700 ... 5000 K (TW)	91	1,952 mm	1.1 kg


Specifications

Lifecycle Status	Active	Ambient temperature	5°C ... 45°C
Beam Geometry	Axially symmetric	Service life (L80/B10)	60,000 h (at 25°C)
Beam Characteristic	Wide Flood	Width (B)	41 mm
Light distribution	Symmetric	Height (H)	48 mm
Degree of protection	IP20	Connection mode	Plug connector
Protection class	III	Dimmable/Controllable	Yes
Optics	Satined	Interface	depending on the driver
Beam angle direct	120°	Housing colour	RAL 9016 (traffic white)
		Nominal current	900 mA

Accessories



Short circuit plug 4p
IL4033_KSS



Cable bracket set (20 pieces)
IL4033_ZM_K_001



instalight NoLimit 4033 profile cover



Extension cable routing for Mid Power Linear and High Power modules



il4033 Control Gear CC external



il4033 Control Gear CC intra-profile TW DALI DT6



il4033 Control Gear CC external TW DALI DT6



il4033 Control Gear CC intra-profile