eldoLED

your product | *our drive*

Quick Start Guide LINEARdrive 210D, 220D (LIN2*0D1)

Connecting and installing DALI compatible LINEARdrive 210D/220D

A Removing the cover

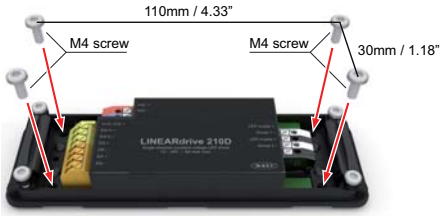

B Mounting the LED driver

C Removing the strain reliefs

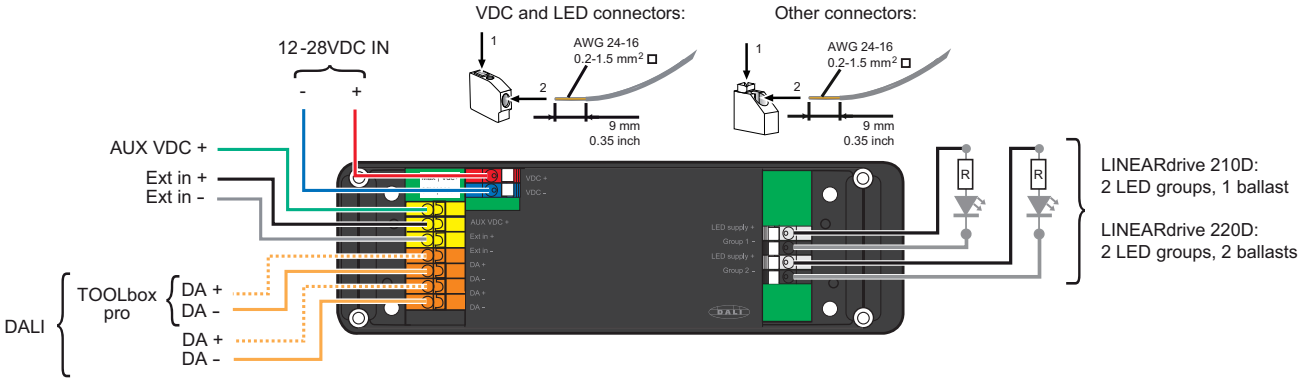

CAUTION: The device may only be connected and installed by a qualified electrician. All applicable regulations, legislation and building codes must be observed. Incorrect installation of the device can cause irreparable damage to the device and the connected LEDs.

Use an identical AWG value for the wires held in place by the same strain relief, so the strain relief is most effective.

D Making the wire connections

E Fastening the strain reliefs

F Replacing the cover

© 2012 eldoLED. All rights reserved. More product documentation and eldoLED's terms and conditions are available at www.eldoled.com. V1.0

eldoLED Europe bv Luchthavenweg 18a 5657 EB Eindhoven The Netherlands T +31 40 2054050 F +31 40 2054058 info@eldoled.com
eldoLED America, Inc. 1762 Technology Drive # 226 San Jose, CA95110 USA T +1 408 451 9333 F +1 408 451 9335 nasales@eldoled.com