


instalight 1065 B  
**Linear facade spot**












The linear spot supplies monochrome light with the highest light intensity in the smallest installation space. A range of perfectly matched optics and optional DALI activation make this luminaire a lighting all-rounder for high quality facade lighting.



















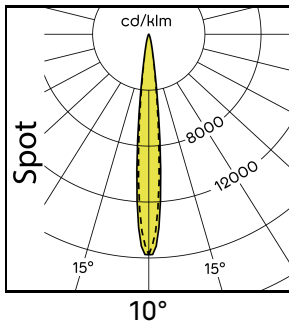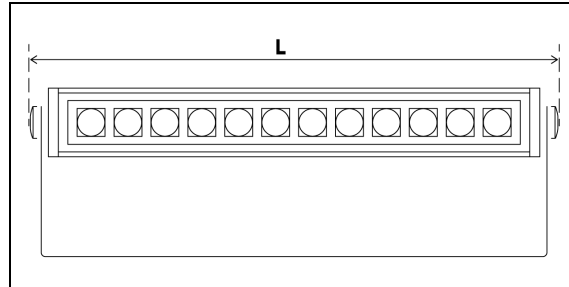
































**Main Features**

- > Ideal for accent lighting by means of rotationally symmetrical or oval optics
- > Uncompromising use as wallwasher thanks to asymmetrical optics
- > Positive locking cover disk prevents dirt adhesion
- > Mounting bracket can be removed for easy and comfortable assembly
- > Ready to connect with system plug for quick and reliable installation
- > Mounting bracket with graduation for fast and reproducible alignment



# Product Variations



				Optics dir.	Max. lumin. flux	Light colour	Connection mode
il_1065_BG_40_DA_830X_S0300_02				40°	2260 lm	3000 K	Plug connector
il_1065_BG_40_DA_830X_L5000_02				40°	2260 lm	3000 K	Free cable end
il_1065_BG_40_DA_840X_L5000_02				40°	2350 lm	4000 K	Free cable end
il_1065_BG_40_DA_840X_S0300_02				40°	2350 lm	4000 K	Plug connector
il_1065_BG_29_DA_830X_S0300_02				28°	2400 lm	3000 K	Plug connector
il_1065_BG_29_DA_830X_L1000_02				28°	2400 lm	3000 K	Free cable end
il_1065_BG_29_DA_840X_S0300_02				28°	2500 lm	4000 K	Plug connector
il_1065_BG_29_DA_840X_L5000_02				28°	2500 lm	4000 K	Free cable end
il_1065_BG_10_DA_830X_S0300_02				10°	2510 lm	3000 K	Plug connector
il_1065_BG_10_DA_830X_L5000_02				10°	2510 lm	3000 K	Free cable end
il_1065_BG_10_DA_840X_S0300_02				10°	2625 lm	4000 K	Plug connector
il_1065_BG_10_DA_840X_L5000_02				10°	2625 lm	4000 K	Free cable end
il_1065_BG_66_DA_830X_L1000_02				66°	2360 lm	3000 K	Free cable end
il_1065_BG_66_DA_830X_S0300_02				66°	2360 lm	3000 K	Plug connector
il_1065_BG_66_DA_840X_S0300_02				66°	2460 lm	4000 K	Plug connector
il_1065_BG_66_DA_840X_L5000_02				66°	2460 lm	4000 K	Free cable end
il_1065_BG_4D_DA_830X_S0300_02				11° x 44°	2280 lm	3000 K	Plug connector
il_1065_BG_4D_DA_830X_L1000_02				11° x 44°	2280 lm	3000 K	Free cable end
il_1065_BG_4D_DA_840X_S0300_02				11° x 44°	2325 lm	4000 K	Plug connector
il_1065_BG_4D_DA_840X_L5000_02				11° x 44°	2325 lm	4000 K	Free cable end
il_1065_BG_5C_DA_830X_S0300_02				11° x 41°	2375 lm	3000 K	Plug connector
il_1065_BG_5C_DA_830X_L1000_02				11° x 41°	2375 lm	3000 K	Free cable end
il_1065_BG_5C_DA_840X_S0300_02				11° x 41°	2475 lm	4000 K	Plug connector
il_1065_BG_5C_DA_840X_L1000_02				11° x 41°	2475 lm	4000 K	Free cable end
il_1065_BG_3D_DA_830X_S0300_02				10° x 12°	2390 lm	3000 K	Plug connector
il_1065_BG_3D_DA_830X_L1000_02				10° x 12°	2390 lm	3000 K	Free cable end
il_1065_BG_3D_DA_840X_L5000_02				10° x 12°	2490 lm	4000 K	Free cable end
il_1065_BG_3D_DA_840X_S0300_02				10° x 12°	2490 lm	4000 K	Plug connector

# Specifications

Lifecycle Status	Active
Rated voltage AC	220 V ... 240 V
Mains frequency	50 / 60 Hz
Power consumption	27.80 W
Power factor	0.94
Power factor $\lambda$	0.95
Degree of protection	IP67
Efficiency class	A
Protection class	I
Protection $\phi$ class	I
Optics	Clear
Ambient temperature	-20°C ... +35°C
Storage/transport temperature	-20 ... +70 °C

Service life (L80/B10)	60,000 h (at 25°C)
Length (L)	500 mm
Width (B)	70 mm
Height (H)	164 mm
Connection mode	Plug connector ('S') / Free cable ends ('L')
Cable length	1 m / 5 m ('L'); 0.3 m ('S')
Dimmable/Controllable	Yes
Housing colour	Silver grey
Housing material	Aluminium
Cover material	Tempered glass
Weight	3.3 kg
Impact strength	IK10 / IK05
Nominal current	220 mA

# Accessories



**Y connector RST 230V/DALI  
IP67, 10-14 mm**  
*IL LTG 5P YV*



**Extension cable RST 230 V  
DALI 1.0 m**  
*IL LTG 5P VL1*



**Extension cable RST 230 V  
DALI 2.0 m**  
*IL LTG 5P VL2*



**Extension cable RST 230 V  
DALI 5.0 m**  
*IL LTG 5P VL5*



**Socket RST 230 V/DALI  
IP67, 10-14 mm**  
*IL LTG 5P AN BU*