


instalight 1065 DB
Linear facade spot






The linear spot supplies monochrome light with the highest light intensity in the smallest installation space. A range of perfectly matched optics make this luminaire a lighting all-rounder for high quality facade lighting.

Main Features


- > Ideal for accent lighting by means of rotationally symmetrical or oval optics
- > Uncompromising use as wallwasher thanks to asymmetrical optics
- > Positive locking cover disk prevents dirt adhesion
- > Listed for use at the Deutsche Bahn AG
- > Mounting bracket can be removed for easy and comfortable assembly
- > Mounting bracket with graduation for fast and reproducible alignment
- > Mounting bracket in lower version available on request




Product Variations

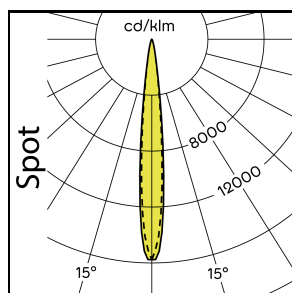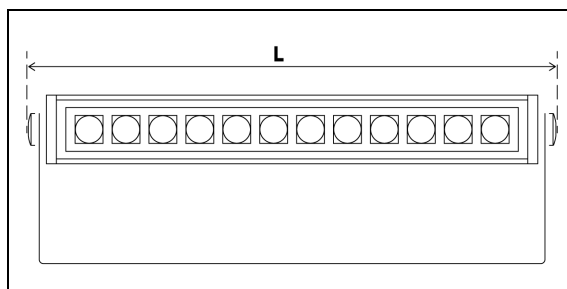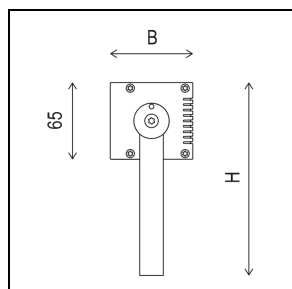


10°

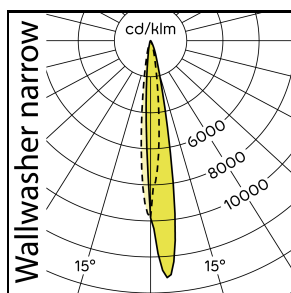


10° X 12°

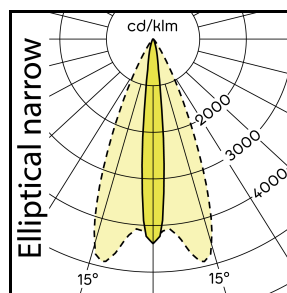


11° X 41°

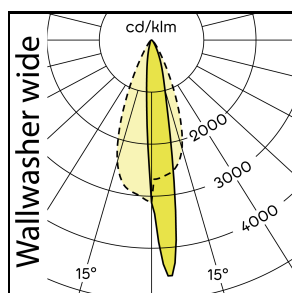

11° X 44°

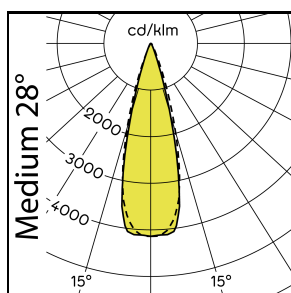

28°

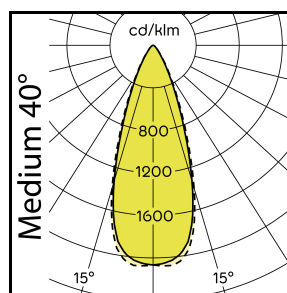

40°

	DB-listed	Optics dir.	Max. lumin. flux	Light colour
il 1065 R B3D 2230 WWH	No	10° x 12°	1800 lm	3000 K
il 1065 R B05 2230 WWH	No	10°	1650 lm	3000 K
il 1065 R B4D 2230 WWH	No	11° x 41°	1600 lm	3000 K
il 1065 R B5C 2230 WWH	No	11° x 44°	1800 lm	3000 K
il 1065 R B15 2230 WWH	No	28°	1800 lm	3000 K
il 1065 R B20 2230 WWH	No	40°	1800 lm	3000 K
il 1065 R B3D 2230 NWH	Yes	10° x 12°	2000 lm	4000 K
il 1065 R B05 2230 NWH	Yes	10°	1800 lm	4000 K
il 1065 R B5C 2230 NWH	Yes	11° x 44°	2000 lm	4000 K
il 1065 R B4D 2230 NWH	Yes	11° x 41°	1800 lm	4000 K
il 1065 R B15 2230 NWH	Yes	28°	2000 lm	4000 K
il 1065 R B20 2230 NWH	Yes	40°	2000 lm	4000 K

Specifications

Lifecycle Status	Active
Rated voltage AC	220 ... 240 V
Mains frequency	50 / 60 Hz
Power consumption	28 W
Power factor	0.95
Degree of protection	IP67
Efficiency class	A
Protection class	II
Optics	Clear
Ambient temperature	-20 ... +35 °C
Storage/transport temperature	-20 ... +70 °C

Service life (L80/B10)	(@ 25 °C) 60,000 h
Length (L)	500 mm
Width (B)	70 mm
Height (H)	164 mm
Connection mode	Screw terminal
Cable length	1000 mm
Dimmable/Controllable	No
Housing colour	Silver grey
Housing material	Aluminium
Cover material	Tempered glass
Weight	2.3 kg
Impact strength	IK10 / IK05

Accessories



**Extension cable RST 230 V
1.0 m**
IL LTG 3P VL1



**Extension cable RST 230 V
2.0 m**
IL LTG 3P VL2



**Extension cable RST 230 V
5.0 m**
IL LTG 3P VL5



**Y connector RST 230 V IP67,
6-10 mm**
IL LTG 3P YV



**Socket RST 230 V IP67, 6-10
mm**
IL LTG 3P AN BU