


instalight 1065 RGB  
**Linear facade spot**







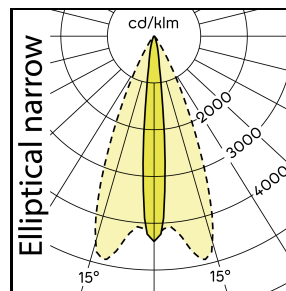
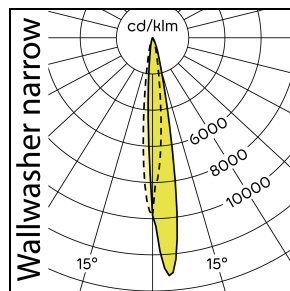
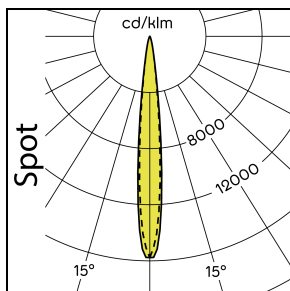
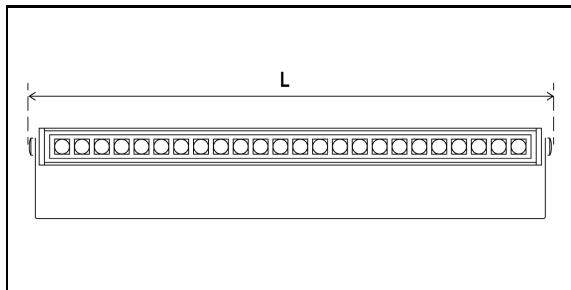
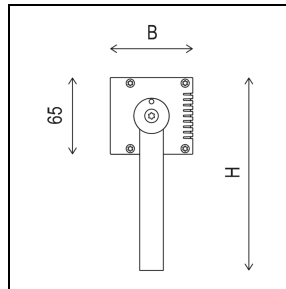
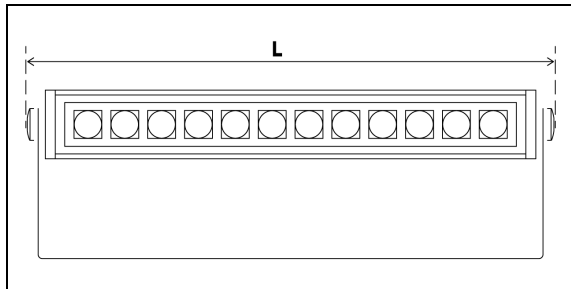
The linear RGB spot supplies the highest light intensity in the smallest installation space. A range of perfectly matched optics and full DMX compatibility make this luminaire a lighting all-rounder for high quality facade lighting.







**Main Features**

- > Ideal for accent lighting by means of rotationally symmetrical or oval optics
- > Uncompromising use as wallwasher thanks to asymmetrical optics
- > External colour mixing
- > Positive locking cover disk prevents dirt adhesion
- > Mounting bracket can be removed for easy and comfortable assembly
- > Ready to connect with system plug for quick and reliable installation
- > Mounting bracket with graduation for fast and reproducible alignment




# Product Variations



				P	Optics dir.	Max. lumin. flux	Length (L)	Connection mode
il_1065_BG_40_DX_RGB_S0300_01				29.50 W	40°	435 lm	500 mm	Plug connector
il_1065_BG_40_DX_RGB_L5000_01				29.50 W	40°	435 lm	500 mm	Free cable end
il_1065_AG_40_DX_RGB_S0300_01				52.60 W	40°	870 lm	920 mm	Plug connector
il_1065_AG_40_DX_RGB_L5000_01				52.60 W	40°	870 lm	920 mm	Free cable end
il_1065_BG_29_DX_RGB_S0300_01				29.50 W	28°	470 lm	500 mm	Plug connector
il_1065_BG_29_DX_RGB_L5000_01				29.50 W	28°	470 lm	500 mm	Free cable end
il_1065_AG_29_DX_RGB_L5000_01				52.60 W	28°	935 lm	920 mm	Free cable end
il_1065_AG_29_DX_RGB_S0300_01				52.60 W	28°	935 lm	920 mm	Plug connector
il_1065_BG_10_DX_RGB_L5000_01				29.50 W	10°	470 lm	500 mm	Free cable end
il_1065_BG_10_DX_RGB_S0300_01				29.50 W	10°	470 lm	500 mm	Plug connector
il_1065_AG_10_DX_RGB_L1000_01				52.60 W	10°	935 lm	920 mm	Free cable end
il_1065_AG_10_DX_RGB_S0300_01				52.60 W	10°	935 lm	920 mm	Plug connector
il_1065_BG_66_DX_RGB_L1000_01				29.50 W	66°	435 lm	500 mm	Free cable end
il_1065_BG_66_DX_RGB_S0300_01				29.50 W	66°	435 lm	500 mm	Plug connector
il_1065_AG_66_DX_RGB_S0300_01				52.60 W	66°	900 lm	920 mm	Plug connector
il_1065_AG_66_DX_RGB_L5000_01				52.60 W	66°	900 lm	920 mm	Free cable end
il_1065_BG_4D_DX_RGB_S0300_01				29.50 W	11° x 44°	435 lm	500 mm	Plug connector
il_1065_BG_4D_DX_RGB_L1000_01				29.50 W	11° x 44°	435 lm	500 mm	Free cable end
il_1065_AG_4D_DX_RGB_L5000_01				52.60 W	11° x 44°	870 lm	920 mm	Free cable end
il_1065_AG_4D_DX_RGB_S0300_01				52.60 W	11° x 44°	870 lm	920 mm	Plug connector
il_1065_BG_5C_DX_RGB_S0300_01				29.50 W	11° x 41°	435 lm	500 mm	Plug connector
il_1065_BG_5C_DX_RGB_L1000_01				29.50 W	11° x 41°	435 lm	500 mm	Free cable end
il_1065_AG_5C_DX_RGB_S0300_01				52.60 W	11° x 41°	935 lm	920 mm	Plug connector
il_1065_AG_5C_DX_RGB_L5000_01				52.60 W	11° x 41°	935 lm	920 mm	Free cable end
il_1065_BG_3D_DX_RGB_L5000_01				29.50 W	10° x 12°	470 lm	500 mm	Free cable end
il_1065_BG_3D_DX_RGB_S0300_01				29.50 W	10° x 12°	470 lm	500 mm	Plug connector
il_1065_AG_3D_DX_RGB_S0300_01				52.60 W	10° x 12°	935 lm	920 mm	Plug connector
il_1065_AG_3D_DX_RGB_L5000_01				52.60 W	10° x 12°	935 lm	920 mm	Free cable end

# Specifications

Lifecycle Status	Active
Rated voltage AC	220 V ... 240 V
Mains frequency	50 / 60 Hz
Power factor $\lambda$	0.90 / 0.95
Degree of protection	IP67
Efficiency class	A
Protection class	I
Protection  class	I
Optics	Clear
Light colour	RGB
Ambient temperature	-20°C ... +35°C

Storage/transport temperature	-20 ... +70 °C
Service life (L80/B10)	60,000 h (at 25°C)
Width (B)	70 mm
Height (H)	164 mm
Connection mode	Plug connector ('S') / Free cable ends ('L')
Cable length	1 m / 5 m ('L'); 0.3 m ('S')
Dimmable/Controllable	Yes
Housing colour	Silver grey
Housing material	Aluminium
Cover material	Tempered glass
Weight	3.3 kg / 5.1 kg
Impact strength	IK10 / IK05

# Accessories



**Extension cable RST 230 V  
1.0 m**  
*IL LTG 3P VL1*



**Extension cable RST 230 V  
2.0 m**  
*IL LTG 3P VL2*



**Extension cable RST 230 V  
5.0 m**  
*IL LTG 3P VL5*



**Socket RST 230 V IP67, 6-10  
mm**  
*IL LTG 3P AN BU*



**Y connector RST 230 V IP67,  
6-10 mm**  
*IL LTG 3P YV*



**Connection cable DMX M12  
IP67 socket, 1 m**  
*IL LTG DX AL1*



**Connection cable DMX M12  
IP67 socket, 5 m**  
*IL LTG DX AL5*



**T connector DMX M12 IP67  
IN/OUT/luminaire**  
*IL LTG DX YV*



**Extension cable DMX M12  
IP67 1.0 m**  
*IL LTG DX VL1*



**Extension cable DMX M12  
IP67 2.0 m**  
*IL LTG DX VL2*



**Extension cable DMX M12  
IP67 5.0 m**  
*IL LTG DX VL5*



**Load resistance DMX M12  
IP67 connector**  
*IL LTG DX AB R*