

instalight 3065 R 01

Cubic compact spot with wall plate




The miniature spot, with its high light output, can primarily show its benefits in targeted accenting. Precisely directed white light, an integrated power supply module and the ultra-compact design turn this luminaire into the ideal lighting tool for delicate presentations on buildings, as well as in parks and gardens.

Main Features

- > Minimum installation and planning effort due to direct access to main voltage
- > Positive locking cover disk prevents dirt adhesion
- > Mounting bracket can be removed for easy and comfortable assembly



Product Variations

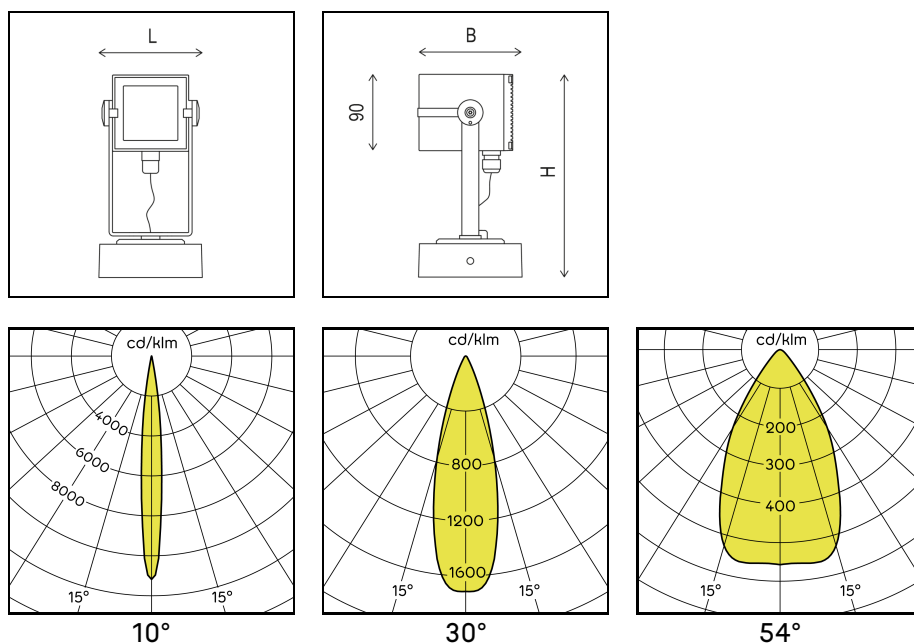

	Optics dir.	Max. lumin. flux	Light colour
il 3065R A 10 830 A1 0230 01	10°	940 lm	3000 K
il 3065R A 10 840 A1 0230 01	10°	950 lm	4000 K
il 3065R A 30 830 A1 0230 01	30°	860 lm	3000 K
il 3065R A 30 840 A1 0230 01	30°	910 lm	4000 K
il 3065R A 54 840 A1 0230 01	54°	800 lm	4000 K
il 3065R A 54 830 A1 0230 01	54°	820 lm	3000 K

Specifications

Lifecycle Status	Active	Service life (L80/B10)	60,000 h
Rated voltage AC	230 / 240 V	Length (L)	122 mm
Mains frequency	50 / 60 Hz	Width (B)	122 mm
Power consumption	9.5 W	Height (H)	237 mm
Power factor	0.6	Connection mode	Plug terminal
Degree of protection	IP67	Dimmable/Controllable	No
Efficiency class	A+	Interface	No
Protection class	I	Housing colour	Silver grey
Optics	Clear	Housing material	Aluminium
Colour rendition Ra	85	Cover material	Tempered glass
Ambient temperature	-20 ... +35 °C	Weight	approx. 2.15 kg
Storage/transport temperature	-25 ... +85 °C	Impact strength	IK10 / IK05