

instalight 3065 R 00 LX TW
Cubic compact spot



This mini spot with its high light output is the perfect luminaire for smart accentuation. The precisely directed white light with adjustable colour temperature is the ideal lighting tool to realise delicate dynamic light scenes on facades or in parks and gardens.



Main Features

- > Tunable White for the scenographic lighting
- > A unique control algorithm guarantees constant brightness over the entire adjustment range
- > Positive locking cover disk prevents dirt adhesion
- > Mounting bracket can be removed for easy and comfortable assembly
- > Ready to connect with system plug for quick and reliable installation
- > Mounting bracket with graduation for fast and reproducible alignment
- > Smart, small and robust
- > Two different optic variants (Narrow Spot or Bi-Symmetric)
- > External power supplies and control components on request





Product Variations

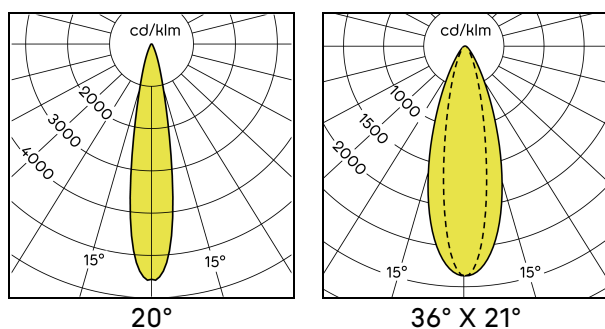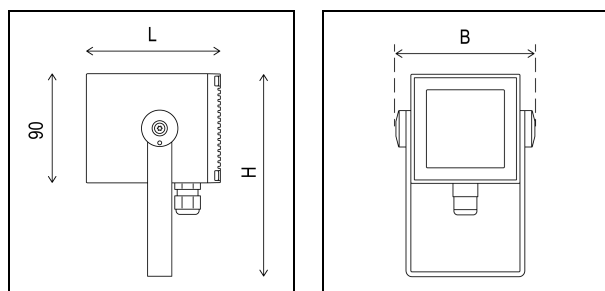

	Optics dir.	Max. lumin. flux
il 3065R A 20 2765 A1 xxxx	20°	760 lm
il 3065R A5C 2765 A1 xxxx	36° x 21°	880 lm

Specifications

Lifecycle Status	Active	Service life (L80/B10)	(@ 25 °C) 60,000 h
Rated voltage DC	24 V SELV	Length (L)	110 mm
Power consumption	9.2 W	Width (B)	105 mm
Degree of protection	IP67	Height (H)	167 mm
Efficiency class	A+	Connection mode	Free cable ends
Protection class	III	Dimmable/Controllable	Yes
Optics	Clear	Interface	LEDTRIX
Light colour	2700 ... 6500 K	Housing colour	Silver grey
Colour rendition Ra	85	Housing material	Aluminium
Ambient temperature	-25 ... +35 °C	Cover material	Tempered glass
Storage/transport temperature	-25 ... +85 °C	Weight	1.5 kg
		Impact strength	IK10 / IK05